

## Specifications

# SMART kapp



SMART kapp® 42" capture board (kapp42)

## Overview


The SMART kapp® 42" capture board enables you to collaborate with others in a simple but powerful way. Write and draw on the capture board like you would a regular dry erase board. You can then connect a Bluetooth®-enabled mobile device to the capture board by scanning a Quick Response (QR) code or by tapping the Near Field Communication (NFC) tag. When you first connect your mobile device, you're directed to the Apple App Store or Google Play™ to download the SMART kapp app. After you download and install the app, you can use it to connect to your capture board and share content with others.

See [smartkapp.com](http://smartkapp.com) for more information on this product.



## Dimensions and weights<sup>1</sup>

### Dimensions

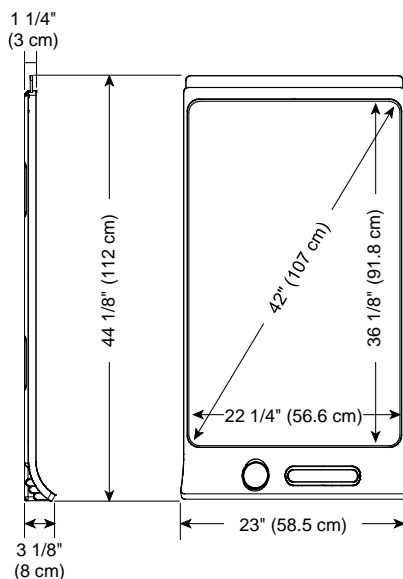

### Weight

35 lb. (16 kg)

### Shipping dimensions

One unit on a pallet  
47 1/4" × 25" × 5 3/8"  
(119.9 cm × 63.5 cm × 13.6 cm)

### Shipping weight

One unit on a pallet  
47 lb. (21.3 kg)  
Seven units on a pallet  
270 lb. (122.5 kg)

<sup>1</sup>All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

## Parts and features

<b>Included parts</b>	SMART kapp 42" capture board Dry erase marker (×3) Eraser Brackets and hardware for mounting the capture board to a wall Power supply with international plugs
<b>Digital capture technology</b>	DViT® (Digital Vision Touch) technology
<b>Wireless technology</b>	Bluetooth® 4.0 Dual Mode (backwards compatible with Bluetooth 2.1 + EDR)
<b>Capture options</b>	Establish a Bluetooth wireless connection with a supported mobile device (see below) by doing one of the following: <ul style="list-style-type: none"> <li>• Scan the capture board's unique QR code</li> <li>• Tap the capture board's NFC tag (Android™ devices only)</li> <li>• Connect a USB drive</li> </ul>
<b>USB drive support</b>	USB 2.0 Type-A receptacle (support for FAT-formatted USB drives only)
<b>Frame finish</b>	Bright White

## Mobile device support

<b>Apple devices</b>	iOS 7.1 or later operating system software 50 MB storage iPhone 4S or later Third generation iPad or later First generation iPad mini or later Fifth generation iPod touch or later
<b>Android devices</b>	Android 4.4.4 (KitKat) or later operating system 50 MB of storage (internal or SD card) Devices meeting the following specifications: <ul style="list-style-type: none"> <li>• 1024 MB of RAM</li> <li>• 720p or better screen resolution</li> <li>• Bluetooth 2.1 + EDR or later</li> <li>• NFC (recommended)</li> <li>• 3 megapixel or better rear-facing camera (recommended)</li> </ul>

## Supported browsers

<b>Mobile devices</b>	
Android devices	Chrome for Android 39.0.2171.93 or later
Apple devices	Safari for iOS 7.1 or later operating system software
<b>Desktop</b>	Safari 8.0 or later Chrome 39.0.2171.95 or later Firefox 34.0.5 or later Internet Explorer 10 or later

## Mounting

<b>Options</b>	Included mounting bracket Standard VESA® 400 mm × 400 mm mounting bracket (not included)
----------------	---


<b>Recommended height</b>	69" (175.3 cm) from the floor to the middle of the included mounting bracket
---------------------------	--

### Bolt requirements for VESA mounting bracket

Size	M6
------	----



<b>Maximum length</b>	To avoid damage to the capture board, ensure the bolt is no longer than 5/16" (8 mm) plus the width of the washer (a) and the width of the bracket (b)
-----------------------	--



## Power

<b>Power requirements</b>	100 V to 240 V AC, 50Hz to 60Hz
---------------------------	---------------------------------

<b>Power consumption at 77°F (25°C)</b>	10 W (maximum)
---	----------------

<b>Power cable</b>	7' 10 1/2" (2.4 m) power cable
--------------------	--------------------------------

## Storage and operating requirements

### Storage

Temperature	-40–140°F (-40–60°C)
Humidity	5–95% relative humidity, non-condensing

### Operating

Temperature	41–95°F (5–35°C)
Humidity	10–80% relative humidity, non-condensing

## Certification and compliance

<b>Regulatory certification</b>	CE, ETL, C-Tick, FCC
---------------------------------	----------------------

### Environmental compliance

European Union	REACH, RoHS, WEEE and Packaging
U.S.	Packaging and Conflict Minerals

## Purchasing information

### Order numbers

KAPP42	SMART kapp 42" capture board
--------	------------------------------

### Warranty

North America	90-day limited equipment warranty
UK	One-year limited equipment warranty
Europe	Two-year limited equipment warranty

### Extended warranties

EWY1-KAPP42	One-year extended warranty
EWY2-KAPP42	Two-year extended warranty

### Replacement parts

Replacement markers, power supply, mounting hardware and erasers can be purchased from the Store for SMART Parts (see [smarttech.com/Support/PartsStore](http://smarttech.com/Support/PartsStore)).

[smartkapp.com](http://smartkapp.com)

[smartkapp.com/support](http://smartkapp.com/support)

© 2014–2015 SMART Technologies ULC. All rights reserved. DVIT, kapp, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Apple, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android and Google Play are trademarks of Google Inc. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: [www.smarttech.com/patents](http://www.smarttech.com/patents). Contents are subject to change without notice. 06/2015.